

FLAP BARRIER


Introduction: -Flap Barrier is capable of controlling the pedestrian entering or exiting the restricted areas. It is designed to provide access control and complete security in public passages. It demotes the way out of the security dilemma and it provides safety and security to the employees of an organization and also to the assets in a business. At the same time, it gives a high level of access to the public and the visitors. This has a big benefit for the people whose entire revenue depends on a constant pedestrian flow while safeguarding and security its assets and personnel at a time. It is the scientific crystallization of the high development of social civilization and it opens a new era for scientific management.

CHARACTERISTICS

With function of self-examine and alarm, it is convenient for maintenance and use. Being able to program running status by a small keyboard in the mainboard. Sound or light alarm function poles are automatically locked until an opening signal is received. Poles synchronization. Automatically reset function: It will automatically lock if the pedestrian hasn't passed through the channel in the pre-set time after the opening. The passing time is adjustable. Channels automatically open when power off and automatically close when power on. Several card reading devices are attachable. one direction or bi-direction control is optional. It can be directly controlled and managed by remote control.



Technical Specification	Description
Product Title	FLAP BARRIER
Application	Inside / Outside
Dimensions:	1200 x 280 x 980 mm
FLAP BARRIER DETAIL	
Finish	Stainless steel finish to Grade 4(Satin Finish)/ Powder coated in structured finish.
Through Out	33 Persons / min
Unlock Time	0.2 s
Pass Width	≤550mm
Temperature Range	(-25°C to +70°C)
Flap material	plastic plate, toughnend glass.
DRIVE UNIT DETAIL	
Drive Unit	Blockable Torque Motor with constant torque output & built in thermal protection.
Power Supply	230+/-VAC, 50 Hz.
Ingress protection	IP 44
Emergency operation	Manual operation for opening. Also can be configured for Flaps to remain closed during power failure.
OPERATING ACCESSORY	
Accessories (Optional)	Access Card Control Face Recognizer

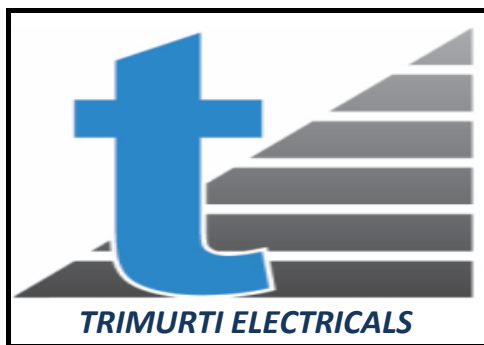

TRIMURTI ELECTRICALS

**G-74, ABUL FAZAL ENCALAVE PART -2
JAMIA NAGAR OKHLA NEW DELHI 110025
LAND MARK:-MEMSAAB SHOW ROOM BACK SIDE
PH.+91 9810 756143 / +91 9810 183658**

EMAIL:- trimurtienquiry@gmail.com